

THERMOPLASTIC ELASTOMER COMPOUNDS




BADA FLEXIBLE PLASTICS

- **Badaflex TPE-S:** compounds based on SEBS
- **Badaflex TPE-E:** polyester elastomers for high operation temperatures
- **Badaprene TPV:** partially crosslinked EPDM/PP compounds with good compression set characteristics
- **Badaflex TPU:** thermoplastic polyurethane with high abrasion resistance
- Shore hardness from 10A to 65D
- Dyeable in any colour shade
- Modification possible for 2-component injection moulding
- Qualities available for injection moulding and extrusion applications

BADAFLEX COMPOUNDS: THE FLEXIBLE SOLUTION

As flexible as rubber and still processible like a thermoplastic: this is what thermoplastic elastomers are generally known for. Badaflex TPE, however, has much more to offer, because the Badaflex product line provides the adequate solution for nearly every demand in the field of soft plastics.

No matter if you need Badaflex TPE dyed in your preferred colour shade, e.g. for handles or seals, Badaflex TPE-E for high temperature applications up to 135 °C (sometimes even beyond) or Badaflex TPU for high abrasion applications - our Badaflex product range will provide the answer. Badaprene TPV is the best option for prefabricated components with extremely favourable compression sets at higher temperatures. For two-component injection moulding, Bada AG offers purpose-modified 2-component types that adhere to e.g. PP, PA, ABS, ABS/PC, or other plastics. Here, Bada offers one-stop solutions for flexible and rigid components. Badaflex is available in a broad hardness range between Shore 10A to 65D. If desired, customized properties (fillers or reinforcements, stabilisation, pigmentation) can be provided on request.

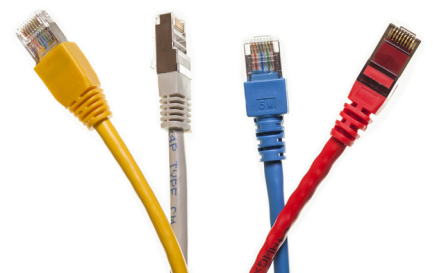


► **FOR MORE DETAILED INFORMATION, PLEASE CONTACT
OUR APPLICATION TECHNOLOGY DEPARTMENT.**

THERMOPLASTIC ELASTOMER COMPOUNDS

BADAFLEX PRODUCT RANGE AT A GLANCE

SHORE HARDNESSES AND TEMPERATURE RANGES¹⁾ AVAILABLE

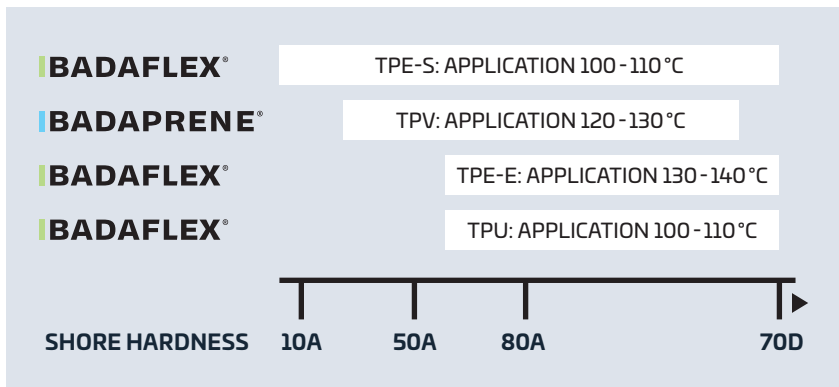

¹⁾ The temperature range depends on the operating conditions and has to be checked individually for each application

BADAFLEX SPECIAL COMPOUNDS – A SMALL SELECTION

- **TPE-S 60A 5123 FR S1:** flame retardant injection moulding type with UL card for "ALL COLOURS"
- **TPE-S 50A 5247 2K black S1:** TPE for 2-component injection moulding with adhesion to ABS or ABS/PC
- **TPE-S 40A 1279 GR:** type with reduced odour for applications in passenger compartments
- **TPE-S 60A 5283 EX natural:** special type for extrusion of profiles with a very smooth surface structure

**CUSTOMIZED MODIFICATIONS ARE AVAILABLE ON REQUEST.
PLEASE CONTACT OUR APPLICATION TECHNOLOGY DEPARTMENT!**

BADAMID®

PA6 PA66 PA66/6 PA6/6T PPA
PA46 PA9T PA12 PA612 PA610

BADATECH HT®

HIGH-PERFORMANCE COMPOUNDS

BADAGREEN®

SUSTAINABLE COMPOUNDS

BADADUR®

PBT BLENDS

BADALAC®

ABS-SPECIALITIES BLENDS

BADALON®

PC-SPECIALITIES BLENDS

BADAFLEX®

TPE-S TPU TPE-E

BADAPRENE®

TPV EPDM PP

BADATRON®

PPS

BADAPROP®

PP-SPECIALITIES



Bada AG | Untere Strut 1 | 77815 Bühl/Baden | Germany
Fon: +49 7223 94077-0 | Fax: +49 7223 94077-77 | info@bada.de

Bada Hispanaplast S.A. | Pol. Ind. Sepes | Ronda de la Industria, n° 153 | 22006 Huesca | España
Fon: +34 974 239774 | Fax: +34 974 243969 | info@bada.com.es

www.bada.de